

1450

Protector

Sensitive equipment needs protection, and since 1976 the answer has been the Pelican™ Protector Case. These cases are designed rugged, and travel the harshest environments on earth. Against the extreme cold of the arctic or the heat of battle, Pelican cases have survived.

Made in the USA, these tough cases are designed with an automatic purge valve, that equalizes air pressure, a watertight silicone O-ring lid, overmolded rubber handles and stainless steel hardware.

- Personalized nameplate service available
- Watertight, crushproof, and dustproof
- Automatic pressure equalization valve balances interior pressure, keeps water out
- · Comfortable rubber over-molded handle
- Easy open double-throw latches
- Lifetime Guarantee of Excellence
- O-ring seal
- Open cell core with solid wall design strong, light weight
- Pick N Pluck™ with convoluted lid foam
- Stainless steel hardware and padlock protectors



CONFIGURATIONS



1450 Standard



1454With Padded Dividers



1450NF No Foam



1450WF With Foam

DIMENSIONS

Interior (L×W×D) 14.66 x 10.24" x 6.12 (37.2 x 26 x 15.5 cm) Exterior (L×W×D) 16.44 x 13.00" x 6.82 (41.8 x 33 x 17.3 cm)

 Lid Depth
 1.75" (4.4 cm)

 Bottom Depth
 4.37" (11.1 cm)

 Total Depth
 6.12" (15.5 cm)

 Int Volume
 0.53 ft³ (0.015 m³)

 Padlock Hole Diameter
 0.31" (0.8 cm)

MATERIALS

Body Polypropylene

LatchABSO-RingPolymerPinsStainless SteelFoam1.3 lb Polyurethane

Purge Body ABS

COLORS



WEIGHT

 Weight With Foam
 6.39 lbs (2.9 kg)

 Weight Empty
 5.51 lbs (2.5 kg)

 Buoyancy
 30.00 lbs (13.6 kg)

 Master Pack Weight
 33.35 lbs (15.1 kg)

TEMPERATURE

Minimum Temperature -40°F (-40 °C) **Maximum Temperature** 210°F (98.9 °C)


CERTIFICATIONS

IP67 MIL C-4150J Def Stan 81-41

OTHER

Master Pack4NameplateyesMilitaryyes

ACCESSORIES

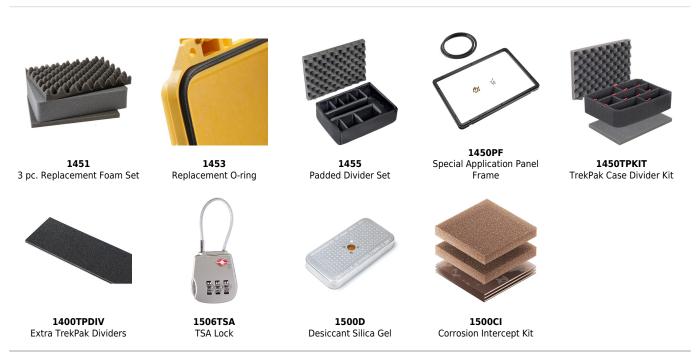

23215 Early Ave • Torrance, CA 90505 USA • Phone: (310) 326-4700 • (800) 473-5422 • Fax: (310) 326-3311 <u>sales@pelican.com</u> • <u>www.pelican.com</u>

Document created on 04-19-24